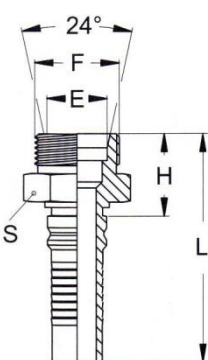



MASCHIO METRICO - SVASATO 24° - SERIE PESANTE
METRIC MALE - 24° CONE SEAT - HEAVY TYPE

CES-I	Codice Code	Diametro Interno Tubo Hose Internal Diameter				Filetto Thread	Tubo Tube	Dimensioni mm Dimensions mm			
		DN	mm	SIZE	Inch.			F	mm	H	L
			CES-I-12-30	20	19,1	12	3/4"	M30X2	20	34	96
CES-I-12-36	20	19,1	12	3/4"	M36X2	25	38	100	25	41	
CES-I-16-36	25	25,4	16	1"	M36X2	25	39	112	25	41	
CES-I-16-42	25	25,4	16	1"	M42X2	30	41	114	30	46	
CES-I-20-42	32	31,8	20	1.1/4"	M42X2	30	43	130	30	46	
CES-I-20-52	32	31,8	20	1.1/4"	M52X2	38	44,5	135	38	55	
CES-I-24-52	40	38,1	24	1.1/2"	M52X2	38	48	138,5	38	55	

FEMMINA METRICA O'RING - OGIVA 24° - DADO LIBERO - SERIE PESANTE
O'RING METRIC FEMALE - 24° CONE - LOOSE NUT - HEAVY TYPE

DKOS-I	Codice Code	Diametro Interno Tubo Hose Internal Diameter				Filetto Thread	Tubo Tube	Dimensioni mm Dimensions mm			
		DN	mm	SIZE	Inch.			F	mm	H	L
			DKOS-I-12-30	20	19,1	12	3/4"	M30X2	20	33	95
DKOS-I-12-36	20	19,1	12	3/4"	M36X2	25	37	98	46		
DKOS-I-16-36	25	25,4	16	1"	M36X2	25	37	110	46		
DKOS-I-16-42	25	25,4	16	1"	M42X2	30	39	112	50		
DKOS-I-20-42	32	31,8	20	1.1/4"	M42X2	30	40	128	50		
DKOS-I-20-52	32	31,8	20	1.1/4"	M52X2	38	46	133	60		
DKOS-I-24-52	40	38,1	24	1.1/2"	M52X2	38	46	140	60		