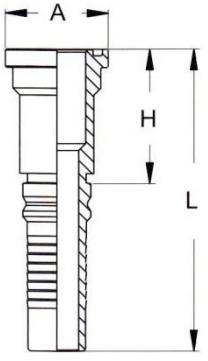




FLANGIA DIRITTA SAE J518 - 3000 PSI - INTERA
STRAIGHT SAE J518 FLANGE - 3000 PSI - ONE PIECE

SFL-I	Codice Code	Diametro Interno Tubo Hose Internal Diameter				Flangia Flange	Dimensioni mm Dimensions mm		
		DN	mm	SIZE	Inch.		H	L	A
			SFL-I-12-12	20	19,1		12	3/4"	3/4"
	SFL-I-12-16	20	19,1	12	3/4"	1"	57,2	119	44,5
	SFL-I-16-12	25	25,4	16	1"	3/4"	58,5	131,5	38,1
	SFL-I-16-16	25	25,4	16	1"	1"	58	131	44,5
	SFL-I-16-20	25	25,4	16	1"	1.1/4"	62,5	135,5	50,8
	SFL-I-20-20	32	31,8	20	1.1/4"	1.1/4"	63,7	151,5	50,8
	SFL-I-20-24	32	31,8	20	1.1/4"	1.1/2"	68,2	156	60,3
	SFL-I-24-24	40	38,1	24	1.1/2"	1.1/2"	68,5	162,5	60,3
	SFL-I-24-32	40	38,1	24	1.1/2"	2"	75,5	169,5	71,4
	SFL-I-32-32	50	50,8	32	2"	2"	76,5	175,5	71,4

FLANGIA 90° SAE J518 - 3000 PSI - INTERA
90° SAE J518 FLANGE - 3000 PSI - ONE PIECE

SFL 90-I	Codice Code	Diametro Interno Tubo Hose Internal Diameter				Flangia Flange	Dimensioni mm Dimensions mm			
		DN	mm	SIZE	Inch.		H	L	K	A
			SFL9-I-12-12	20	19,1		12	3/4"	3/4"	54
	SFL9-I-12-16	20	19,1	12	3/4"	1"	54	115	68	44,5
	SFL9-I-16-12	25	25,4	16	1"	3/4"	70	142	69	38,1
	SFL9-I-16-16	25	25,4	16	1"	1"	70	142	74	44,5
	SFL9-I-16-20	25	25,4	16	1"	1.1/4"	70	142	80	50,8
	SFL9-I-20-20	32	31,8	20	1.1/4"	1.1/4"	88	176	87	50,8
	SFL9-I-20-24	32	31,8	20	1.1/4"	1.1/2"	88	176	93	60,3
	SFL9-I-24-24	40	38,1	24	1.1/2"	1.1/2"	103	197	103	60,3
	SFL9-I-24-32	40	38,1	24	1.1/2"	2"	103	197	132	71,4
	SFL9-I-32-32	50	50,8	32	2"	2"	137	236	133	71,4

FLANGIA 45° SAE J518 - 3000 PSI - INTERA
45° SAE J518 FLANGE - 3000 PSI - ONE PIECE

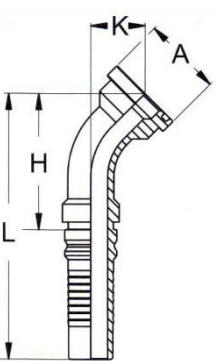SFL 45-I	Codice Code	Diametro Interno Tubo Hose Internal Diameter				Flangia Flange	Dimensioni mm Dimensions mm			
		DN	mm	SIZE	Inch.		H	L	K	A
			SFL4-I-12-12	20	19,1		12	3/4"	3/4"	87
	SFL4-I-12-16	20	19,1	12	3/4"	1"	93	150,5	36,5	44,5
	SFL4-I-16-12	25	25,4	16	1"	3/4"	106	173,5	35	38,1
	SFL4-I-16-16	25	25,4	16	1"	1"	109,5	178	39,5	44,5
	SFL4-I-16-20	25	25,4	16	1"	1.1/4"	114	179	40,5	50,8
	SFL4-I-20-20	32	31,8	20	1.1/4"	1.1/4"	136,5	222,5	53	50,8
	SFL4-I-20-24	32	31,8	20	1.1/4"	1.1/2"	141,5	222,5	53	60,3
	SFL4-I-24-24	40	38,1	24	1.1/2"	1.1/2"	160,5	254	58,5	60,3
	SFL4-I-24-32	40	38,1	24	1.1/2"	2"	164	256,5	62,5	71,4
	SFL4-I-32-32	50	50,8	32	2"	2"	212	309	71,5	71,4